

FIG. 1

Stripe	16(1)	16(2)	16(3)	16(4)	16(5)
S1	B1,1	B1,2	B1,3	B1,4	P1
S2	B2,1	B2,2	B2,3	P2	B2,4
S3	B3,1	B3,2	P3	B3,3	B3,4
S4	B4,1	P4	B4,2	B4,3	B4,4
S5	P5	B5,1	B5,2	B5,3	B5,4
⋮	⋮	⋮	⋮	⋮	⋮
S _{max}	B _{max,1}	P _{max}	B _{max,2}	B _{max,3}	B _{max,4}

FIG. 2

n	Stripe Unit Identity	Time Stamp
1	B _{7,3}	T _{7,3}
2	B _{1,1}	T _{1,1}
3	B _{2,4}	T _{2,4}
4	B _{4,2}	T _{4,2}
5	B _{3,3}	T _{3,3}
⋮	⋮	⋮
n _{max}	B _{4,4}	T _{4,4}

FIG. 4

2/4


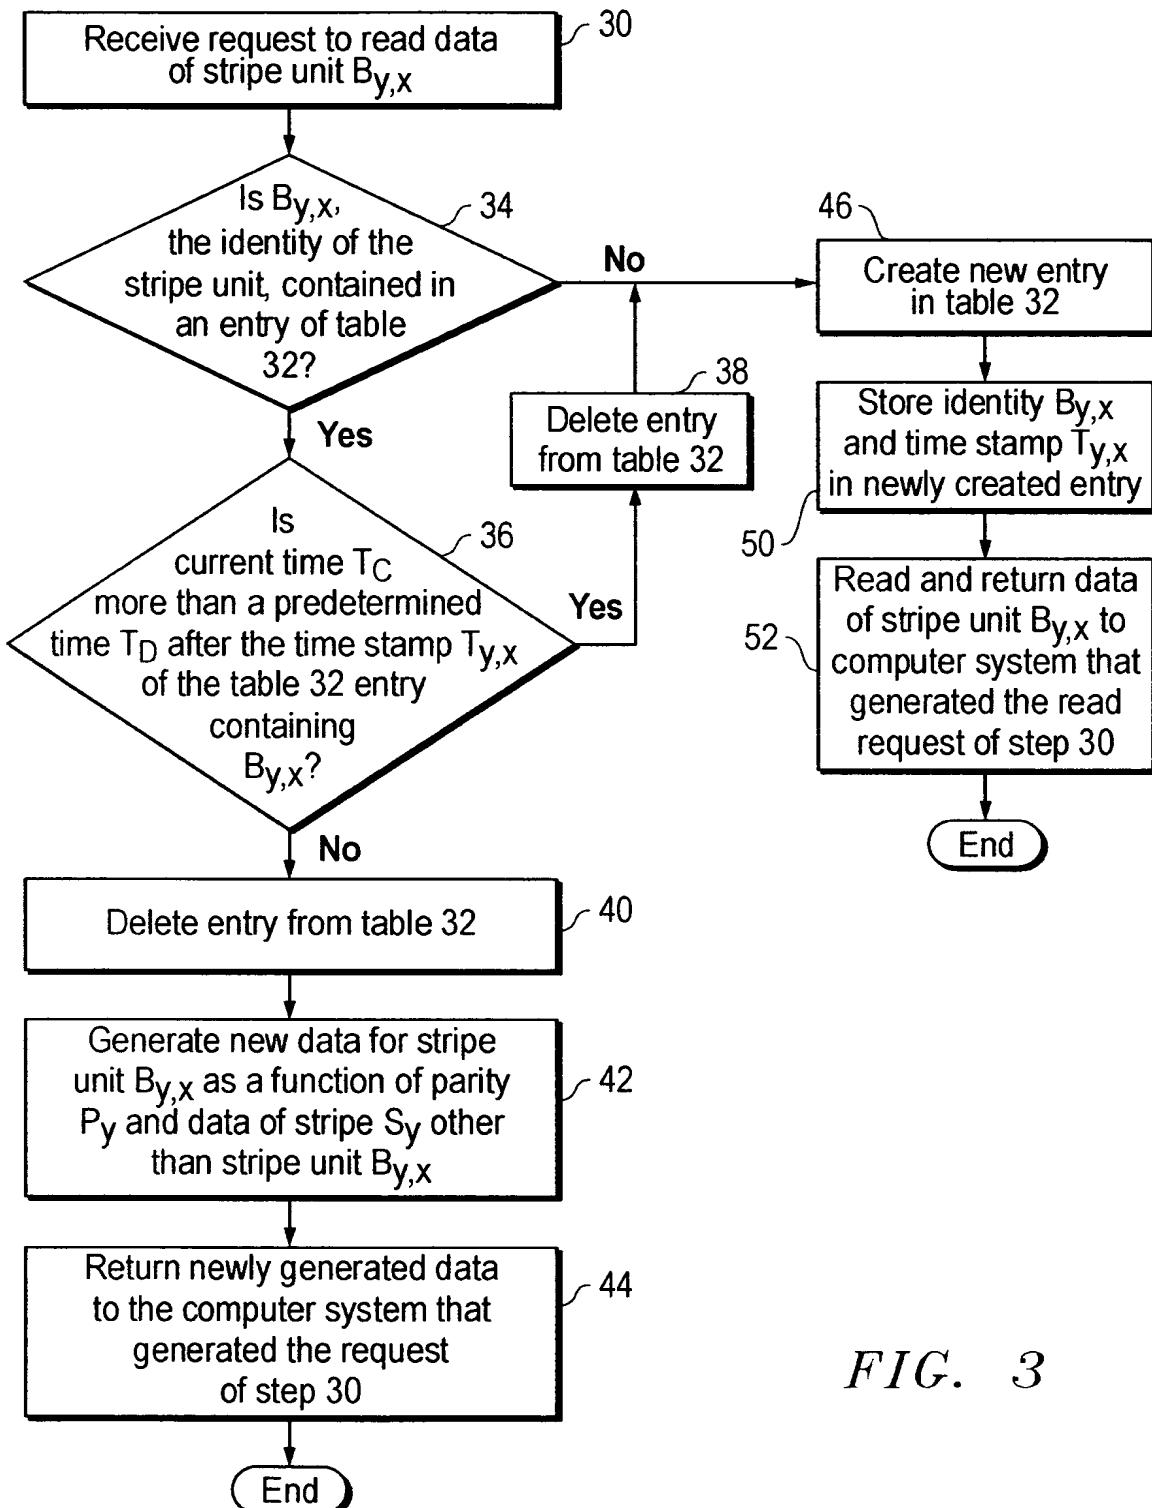


FIG. 3

3 / 4

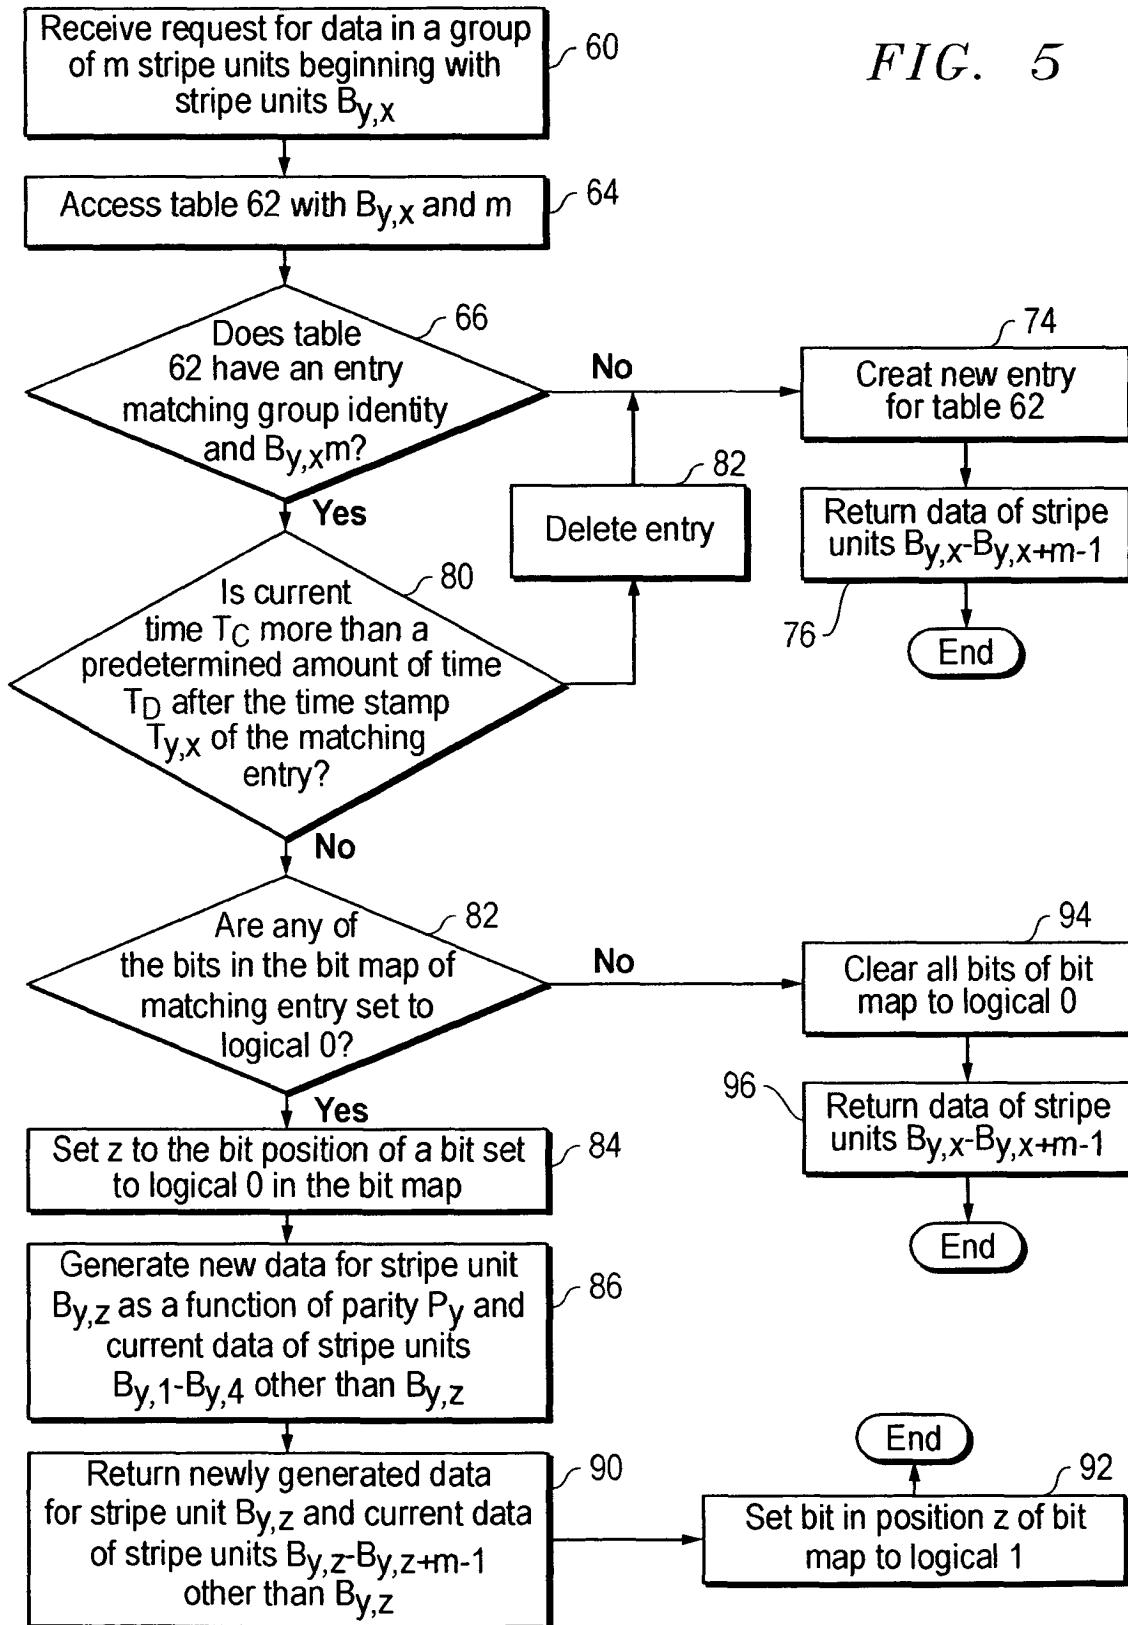

Attorney Docket No.: VRT0059US
First Inventor: Oleg Kiselev
Title: APPLICATION-ASSISTED RECOVERY FROM DATA CORRUPTION IN PARITY RAID STORAGE USING SUCCESSIVE RE-READS

4/4

Group Identity

n	m	First Stripe Unit Identity	Time Stamp	Bit Map	
1	2	B1,3	T1,3	1 0	62
2	4	B7,1	T2,1	1 1 1 0	
3	2	B3,3	T5,3	0 0	
4	3	B4,2	T4,2	0 0 0	
5	4	B1,1	T1,1	1 0 0 0	
⋮					
n _{max}	3	B1,1	T1,1	1 1 0	

FIG. 6